


CLAMP HADICOVÝ ADAPTÉR KRÁTKÝ



- Standard clamp připojení: DIN 32676 clamp límeček 34 mm, 50.5 mm
- Materiál: nerezová ocel 1.4301 (AISI 304)
- Pracovní tlak: max. 10 bar
- Připojení hadice: DN15,20,25,32,40

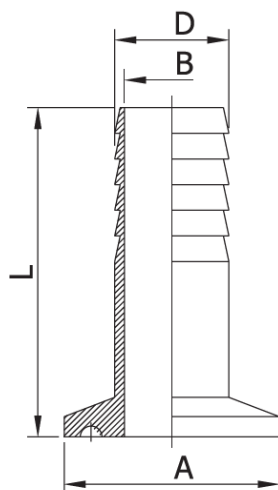

NORMA	SIZE	D(mm)	B (mm)	A (mm)	L (mm)	Max. tlak (bar)
DIN 32676	DN15	18.0	15.0	34.0	40	10
DIN 32676	DN15	18.0	15.0	50.5	42	10
DIN 32676	DN20	21.0	17.5	34.0	42	10
DIN 32676	DN20	21.0	17.5	50.5	42	10
DIN 32676	DN25	27,5	24.0	50.5	42	10
DIN 32676	DN32	34	30.0	50.5	50	10
DIN 32676	DN40	40	36.0	50.5	50	10
DIN 32676	DN50	52	48.0	64	60	10

Materiál certifikát EN 10204 3.1 na požádání.

WATER4LIFE s.r.o.

Prušánky 352

696 21 Prušánky

Czech Republic

E-mail: info@water4life.cz

Tel: +420 777 893 609

VAT number: CZ 29289971

Reference number: C 71338, kept by the Regional Court in Brno, Czech Republic

